




Rock Facing Under Sidewalk

The CITY OF MAPLE VALLEY

STANDARD PLAN NO. MV-5-006

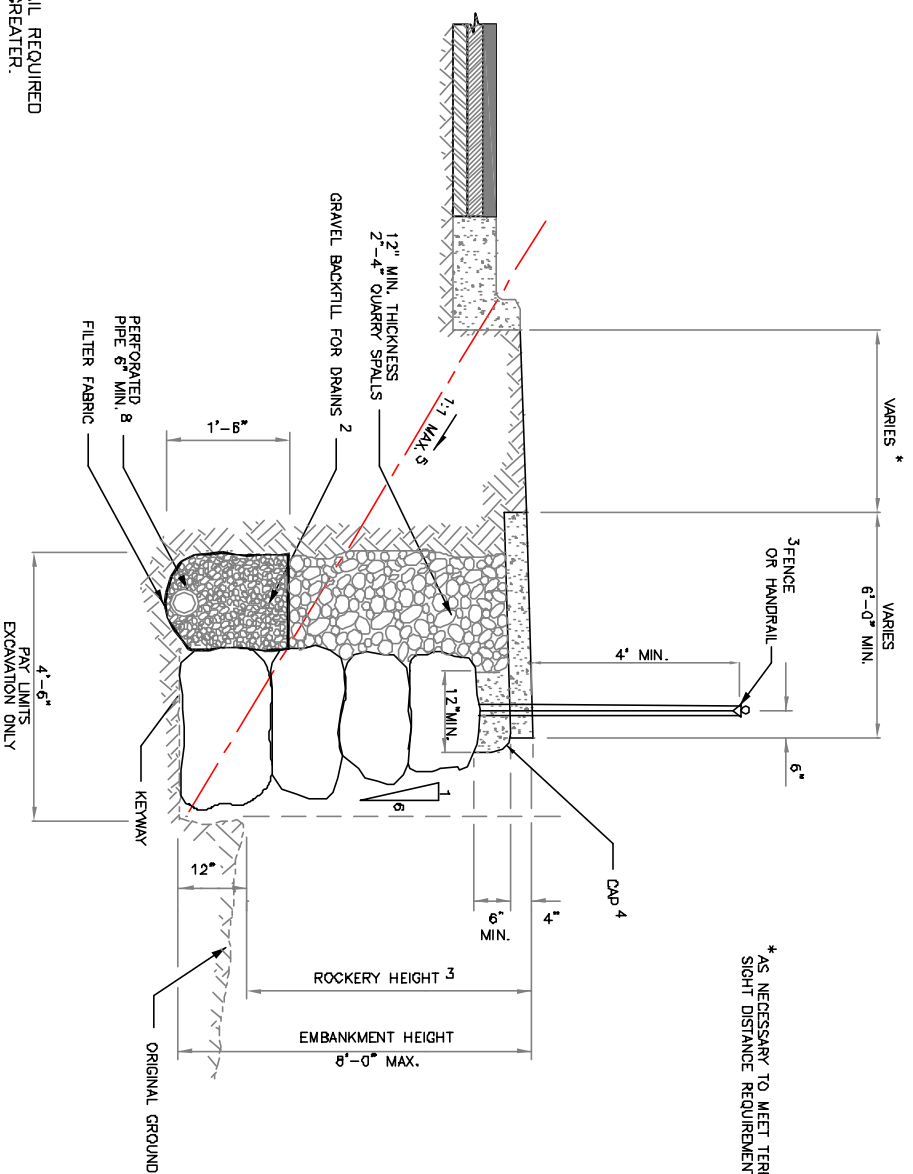

*AS NECESSARY TO MEET TERRAIN AND SIGHT DISTANCE REQUIREMENTS.

- NOTES:
1. SEE SEC 5.01.
2. WSDOT/APWA 9-03.12[4].
3. SIX FOOT WOOD FENCE OR HANDRAIL REQUIRED WHEN ROCKERY HEIGHT IS 3' OR GREATER.
4. CAP SHALL BE CONCRETE CLASS 3000.
5. FLATTER SLOPE MAY BE REQUIRED IN LESS STABLE SOILS.
6. FOR ROCKERY HEIGHTS EXCEEDING 4', SEE DWG. NO. 5-007 AND SECTION 5.12.
7. TRAFFIC BARRIERS MAY BE REQUIRED ON ROADS WITH SPEED LIMITS OF 40 MPH OR GREATER, WHERE HEIGHTS EXCEED 6'. SEE CHAPTER 710 OF THE WSDOT DESIGN MANUAL.
8. PERFORATED PIPE SHALL MEET THE REQUIREMENTS OF WSDOT/APWA STANDARDS, SECTION 9.05.
- PERFORATED
PIPE 6" MIN, 8
FILTER FABRIC